



DEKS OLJE D1®

HARDWOOD OIL SATURATOR


USAGE

- Exterior: garden furniture, doors, fences, stairs, decks, boats etc.
- Interior: parquet floors, doors, windows, stairs, frames etc.
- Horizontal and vertical.
- Hardwoods and exotic tropical woods such as teak, ipé, bovinga, bolondo and iroco.
- Can be applied above and below the water line. Provides an excellent base for traditional underwater coatings.



PROPERTIES

- Optimised for thick, dense, greasy and difficult to impregnate woods.
- Drives out moisture and air by penetrating deep into pores; non film building.
- Protects against humidity and its effects.
- Transparent – keeps the woods natural appearance.
- A matt and natural finish. (For a glossy finish topcoat with DEKS OLJE D2®.)

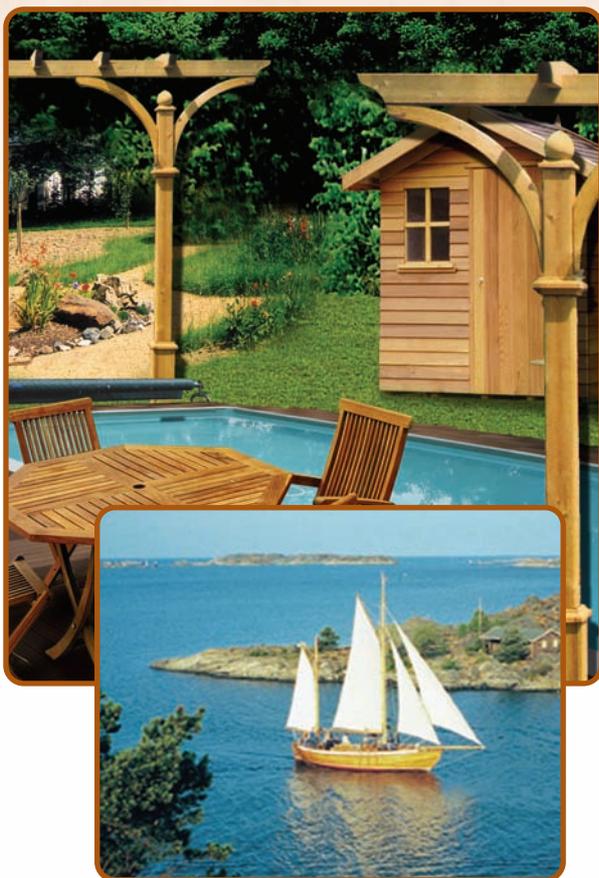

APPLICATION

- Apply a coat of DEKS OLJE D1® until wood is saturated. Allow drying for 15-30 minutes.
- Repeat as many times as necessary until wood will not absorb any more (saturated).
- Apply wet-on-wet, do not allow drying between coats.
- Once surface is saturated, wipe off any excess product to avoid stains and traces of shine when dry.
- Easy maintenance: clean with soap and water and apply – no need for sanding or hard scrubbing.

COVERAGE RATE WHEN WORKING MULTI COAT 1 to 4 m²/l	COVERAGE RATE FOR MAINTENANCE 8 to 12 m²/l	APPLICATION TOOLS 	TEMPERATURE FOR APPLICATION +35°C +5°C 	DRYING TIME 24 hours SETTING UP TIME BEFORE USE 3 days	CLEAN UP WHITE-SPIRIT
--	---	--------------------------	---	---	------------------------------



Owatrol International SL

C/Aragón 179, 5º - 08011 Barcelona - Spain
Tel: +34 934 51 66 04 - Fax: +34 934 52 14 54
info@owatrol.com - www.owatrol.com