

# ASTRO PRO

## Advanced Modified Polymer High Tack Seaming Adhesive For Artificial Grass Surfaces

### Technical Data Sheet



### PRO (HYBRID) RANGE OF SEALANTS & ADHESIVES

#### Description:

*A tough, elastic hybrid seaming adhesive for the installation of artificial grass surfaces.*

#### Benefits:

- ◆ Can be applied to wet surfaces.
- ◆ Solvent-free and odourless.
- ◆ Fast tack and rapid cure time.
- ◆ Non-shrinking and permanently elastic.
- ◆ Simple application.
- ◆ Ideal for maintenance and repair work.

#### Uses

ASTRO PRO is a superior adhesive suitable for use inside and out, in all weather conditions. Has excellent bonding properties even on wet surfaces. Rapid cure time even at low temperatures. Remains fully elastic.

#### Application

Ensure all surfaces are clean and free from dust, grease, oil or any other contaminants that may hinder adhesion. Carefully cut the tip of the cartridge, taking care not to damage the threaded area. Screw on the "notched" nozzle and place cartridge in a standard sealant gun.

Apply the adhesive directly from the cartridge onto the seaming tape. Use a serrated trowel to spread evenly. Weight the joint to ensure a flat, even joint. Join the artificial grass and allow to dry for a few minutes. Full cure will take approximately 24 hours.



#### Coverage

On a typical seam, one cartridge should cover approximately 4 linear metres of jointing tape.

#### Container Size

EU3 plastic cartridge.

#### Colour

Available in green.

#### Shelf Life

12 months from date of manufacture when stored in unopened cartridges.

#### Storage Conditions

Store in original, unopened cartridge, in a cool, dry place at a temperature between +5°C and +25°C.

#### Disposal of Containers

Do not leave empty containers where residue could be harmful to children, animals or the environment. Remove any containers to a central disposal point in accordance with local regulations.

#### Health & Safety


Please refer to separate material safety data sheet for full handling, use and storage instructions. Keep out of reach of children. It is the users responsibility to determine suitability for use. If in doubt contact our Technical Department for advice.

**Note: this information is for general guidance only, since site conditions and labour are beyond our control. It is recommended that users make their own tests to determine suitability.**



## Specification Summary

Curing in 24 hours	2.5mm
Shrinkage	Nil
Skinning Time	approx 10 minutes
MMA (ISO9040)	20%
Elongation at break (DIN 53504)	250%
Shore A Hardness (DIN 53505)	40+/-4
Temperature Resistance	-30°C to +95°C
Application Temperature	+5°C to +40°C
Storage Temperature	+5°C to +25°C
UFI	6030-10UD-K008-7VHD

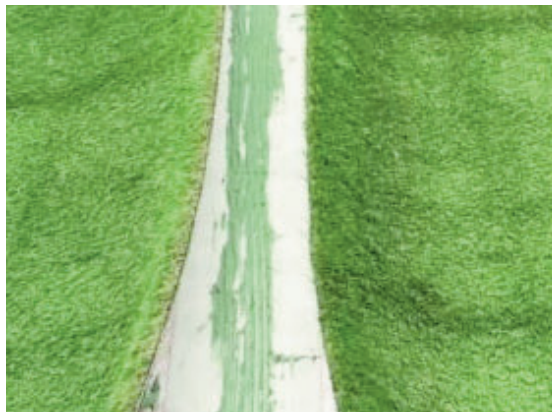

## Product / Order Details:

Code	Colour	Size	Barcode
BDAPROGN	Green	EU3	5056437400307



Part of the Bond It Pro Hybrid Sealants & Adhesive Range



The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties rights and, if necessary clarifying the position. Recommendations for use do not constitute a warranty, either expressed or implied, of the fitness or suitability of the products for a particular purpose.



Certificate Number: 6152  
ISO 9001; ISO 14001;  
ISO 45001



**BOND IT**  
Head Office: Unit G16 River Bank Way, Lowfields Business Park,  
Elland, West Yorkshire HX5 9DN.  
Telephone: +44 (0)1422 315300 Fax +44 (0)1422 315310  
Email: salesuk@bonditgroup.com Website: www.bonditgroup.com



Rev: V4 14/06/22  
Supercedes: V3 23/10/20