


Engineered to provide maximum accuracy for table mounting and hand-held use, this feature-packed, high-performance circular saw delivers power and precision for all cutting requirements. Maximum rigidity is achieved with the strong, aluminium die-cast base, which has alignment cam location holes for easy fitting and fine tuning in Triton Saw Tables. Smooth cutting is easy with the needle and ball-bearing constructed 2000W / 3hp motor which, combined with micro angle and blade height adjustment, gives accurate and professional results every time. Spindle lock and on-board storage of the blade-changing spanner assists with quick blade changing. The quick-action bevel stops, with a highly accurate calibration scale, are convenient and provide precise settings.



Dust Extraction Port
for easy connection to a dust collection system

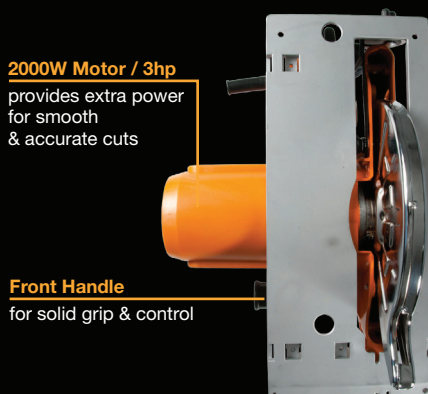

▶ Selling Points

- Smooth, powerful 2000W / 3hp motor
- Accurate calibration scale & blade bevel trimmer
- Strong, aluminium, die-cast base for maximum rigidity
- Alignment cam location holes for easy fitting & fine tuning in Triton Saw Tables
- Quick-action bevel stops at 0°, 15°, 22.5°, 30° & 45°
- Heavy-duty height adjustment assembly

▶ What's in the Box

- Rip Fence
- Blade Adjustment Spanner
- 40 HSS Blade

▶ Key Specifications

	Voltage	
	220-240V 50Hz	120V 60Hz
Power	2000W	3hp
No Load Speed	4100rpm	
Blade Diameter	235mm	9 1/4"
Blade Teeth	40 HSS	
Bevel Range	-1° to 47°	
Cutting Depth	0° - 82mm	0° - 3 15/64"
	45° - 58mm	45° - 2 9/32"
Positive Bevel Stops	0°, 15°, 22.5°, 30° & 45°	
Weight	8kg	17.6lbs